
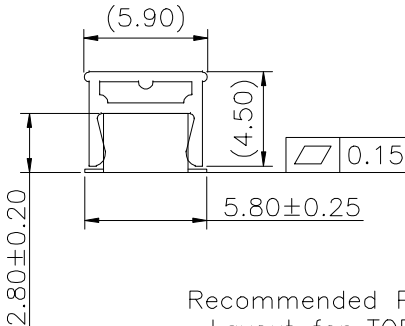
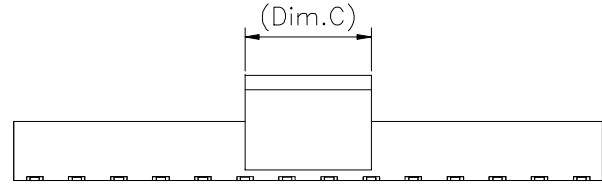



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	△	變更圖號	2011.04.29	龍華明
03	△	為改善貼膠紙效率，變更膠紙配方	2013.01.30	邱明周
04	△	依業務要求，新增下插式LAYOUT	2015.02.03	邱國強
05	△	Added Cap	2022.05.05	郭康



Dim.C	NOTE
4.00mm	02pins
6.00mm	03~35pins

Specifications  
 Current Rating:2.0Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:500VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material  
 All materials must meet Greenconn hazardous substances control standards.

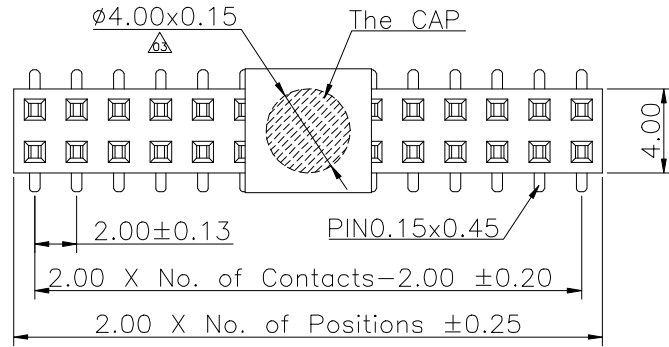

Recommended P.C.Board Layout for TOP entry (Tolerance:±0.05)

Recommended P.C.Board Layout for BOTTOM entry (Tolerance:±0.05)

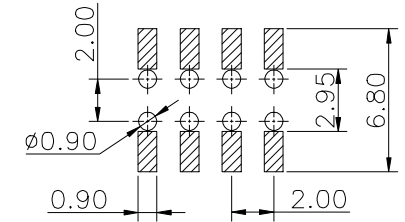

### Ordering Information

C SFC205 - XX XX A 001 R 1 A X

No. of Pins per Row 02~35  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin  
 05=Gold Flash/Tin

Color 1=Black

Standard Packing C=Tube  
 Selective Packing A=Box  
 E=CAP+Tube  
 F=CAP+Tape&Reel  
 G=Acetate Tape+Tube  
 H=Acetate Tape+Tape&Reel

 Website: www.greenconn.com E-mail: sales@greenconn.com	3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE X: ±5.0° X: ±0.30 .X: ±3.0° .X: ±0.25 .XX: ±2.0° .XX: ±0.15 .XXX: ±1.0° .XXX: ±0.10		DESIGNED: 郭康 DATE: 2022.05.05	DWG. NO. △ CSFC205-CA1RA PART NO. CSFC205-XXXX A001R1AX	TITLE. 2.00 FEMALE HEADER DUAL ROWS SMT TYPE BASE 2.80H
		REV. 05 UNIT. mm SCALE. 3:1	CHECKED: 張春進 DATE: 2022.05.05	APPROVED: 邱國強 DATE: 2022.05.05		