



CA0121S0502

COMPACT ALPHA



PRODUCT FEATURES

| | |
|------------------------------|---|
| Power usage | 6 W |
| Power supply | 24 Vdc |
| Light source | LED |
| Electrical connection | Cable 3m (10ft) |
| Color temperature | 5000K, CRI 80 |
| Luminous flux | 600 lm |
| Efficiency | 100 lm/W |
| Light beam angle | 90° |
| Housing | Anodized aluminum |
| Front protection | Tempered glass |
| Protection index | IP67 (compatible with NEMA TYPE 12) |
| Impact resistance | IK06 |
| Operating temperature | -20°C to + 45°C (-04°F to +113°F) |
| Weight | 0,55 kg (1,15 lb) |
| Agency approvals | cURus in compliance with UL2108, CSA C22.2, CE, RoHs |
| Mounting | CAFX02 Stainless-Steel Brackets |

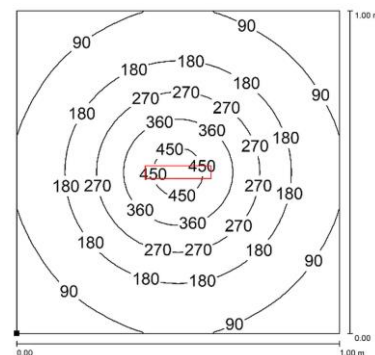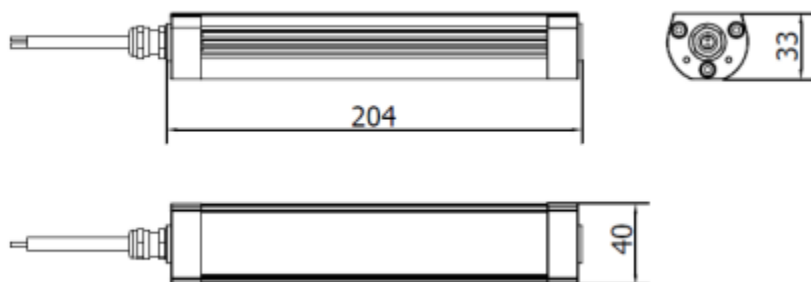

NOTE: Installation Height: 1m