

### Features


- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on  $V_F$
- Temperature-independent Switching
- 175°C Operating Junction Temperature

$V_{RRM}$	=	650	V
$I_F (T_c \leq 135^\circ\text{C})$	=	25	A
$Q_C$	=	37	nC

### Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

### Package



TO-220-2

### Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station



Part Number	Package	Marking
AS3D020065A	TO-220-2	ASD2065A

### Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{RRM}$	Repetitive Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
$V_{RSM}$	Surge Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
$V_R$	DC Blocking Voltage	650	V	$T_C = 25^\circ\text{C}$	
$I_F$	Forward Current	56 25 20	A	$T_C \leq 25^\circ\text{C}$ $T_C \leq 135^\circ\text{C}$ $T_C \leq 147^\circ\text{C}$	
$I_{FSM}$	Non-Repetitive Forward Surge Current	170	A	$T_C = 25^\circ\text{C}$ , $t_p = 8.3\text{ms}$ , Half Sine Wave	
$P_{tot}$	Power Dissipation	176	W	$T_C = 25^\circ\text{C}$	Fig.3
$T_C$	Maximum Case Temperature	147	$^\circ\text{C}$		
$T_J, T_{STG}$	Operating Junction and Storage Temperature	-55 to 175	$^\circ\text{C}$		
	TO-220-2 Mounting Torque	1	Nm	M3 Screw	

### Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$V_F$	Forward Voltage	1.4 1.7	1.65 2.3	V	$I_F = 20\text{A}$ , $T_J = 25^\circ\text{C}$ $I_F = 20\text{A}$ , $T_J = 175^\circ\text{C}$	Fig.1
$I_R$	Reverse Current	2 10	20 200	$\mu\text{A}$	$V_R = 650\text{V}$ , $T_J = 25^\circ\text{C}$ $V_R = 650\text{V}$ , $T_J = 175^\circ\text{C}$	Fig.2
$C$	Total Capacitance	1190 115 96	/	pF	$V_R = 0\text{V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{MHz}$ $V_R = 200\text{V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{MHz}$ $V_R = 400\text{V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{MHz}$	Fig.5
$Q_C$	Total Capacitive Charge	37	/	nC	$V_R = 650\text{V}$ , $I_F = 20\text{A}$ $di/dt = 200\text{A}/\mu\text{s}$ , $T_J = 25^\circ\text{C}$	Fig.4

### Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.85	$^\circ\text{C}/\text{W}$	Fig.6
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	80	$^\circ\text{C}/\text{W}$	
$T_{sold}$	Soldering Temperature	260	$^\circ\text{C}$	

## Typical Performance

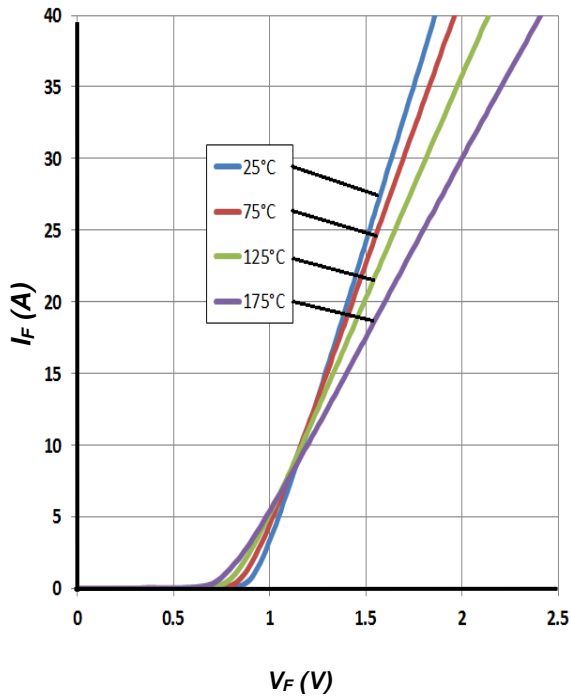


Figure 1. Forward Characteristics

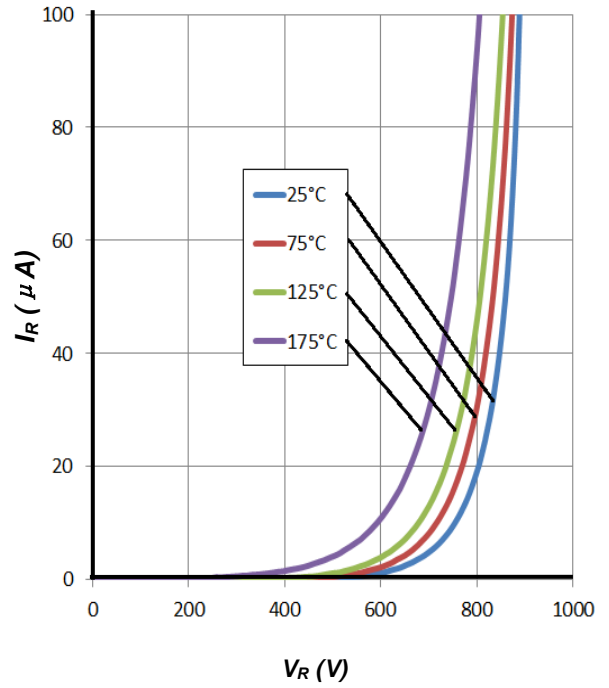


Figure 2. Reverse Characteristics

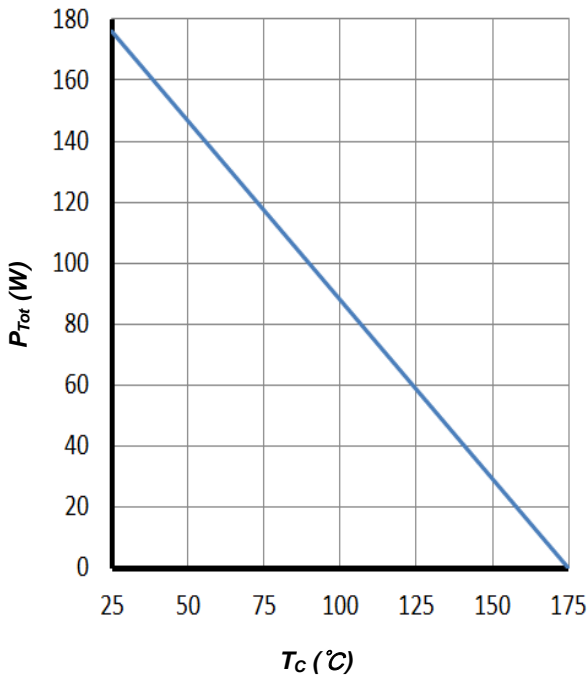


Figure 3. Power Derating

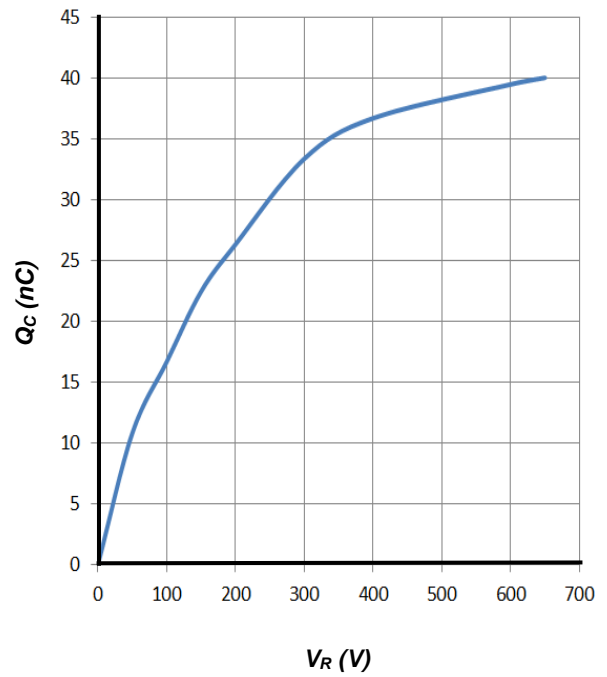


Figure 4. Total Capacitive Charge vs. Reverse Voltage

## Typical Performance

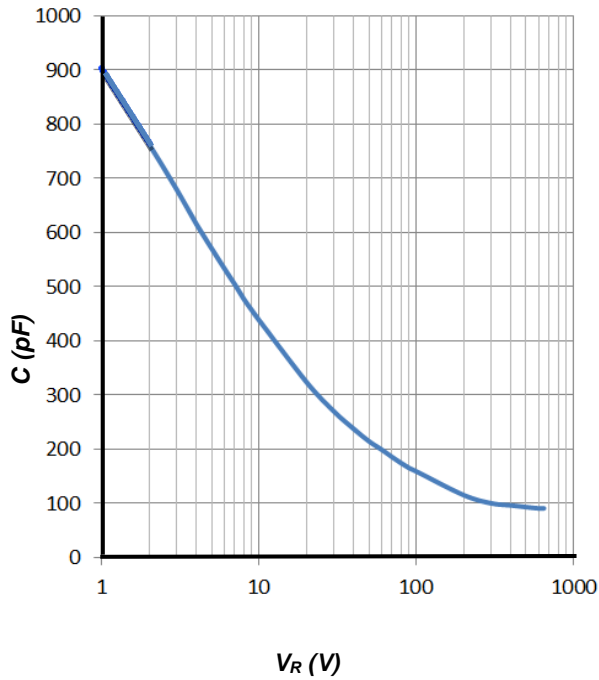


Figure 5. Total Capacitance vs. Reverse Voltage


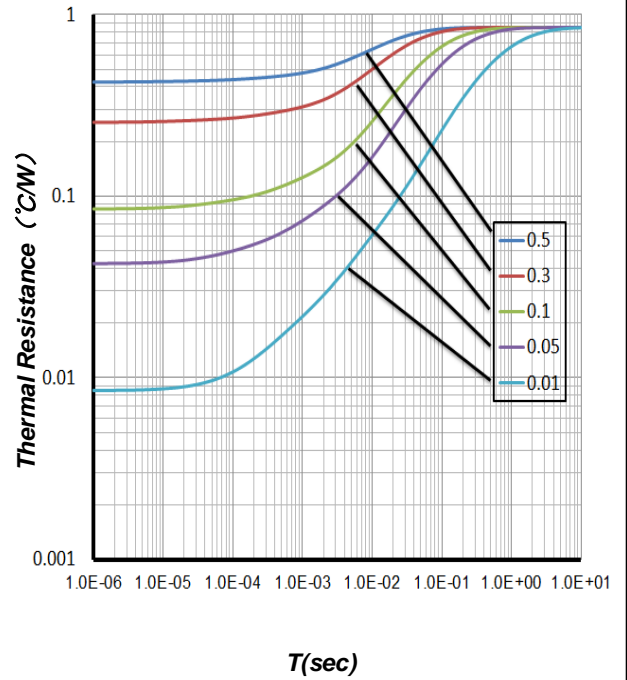


Figure 6. Transient Thermal Impedance

### Package Dimensions

Package TO-220-2

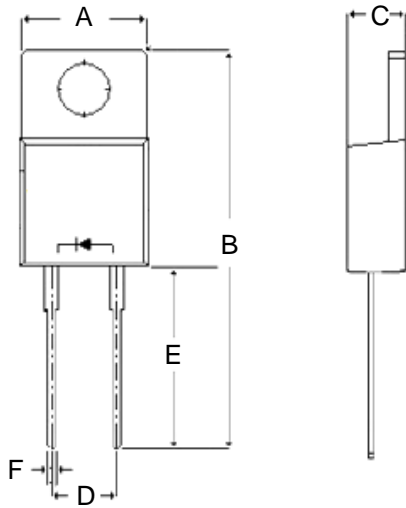

Symbol	Min. (mm)	Typ. (mm)	Max. (mm)
A	9.17	10.08	10.91
B	27.00	28.58	30.00
C	3.89	4.50	5.00
D	4.20	5.10	5.80
E	11.70	13.30	14.97
F	0.50	0.80	1.21