


HIGH BRIGHTNESS 10MM LED FLEX RIBBON

Features

VOLTAGE: 24V DC
CURRENT: 2.5 AMPS
LED VIEWING ANGLE: 120°

STANDARD PACKAGING:
5 METER REEL (400 LED'S)

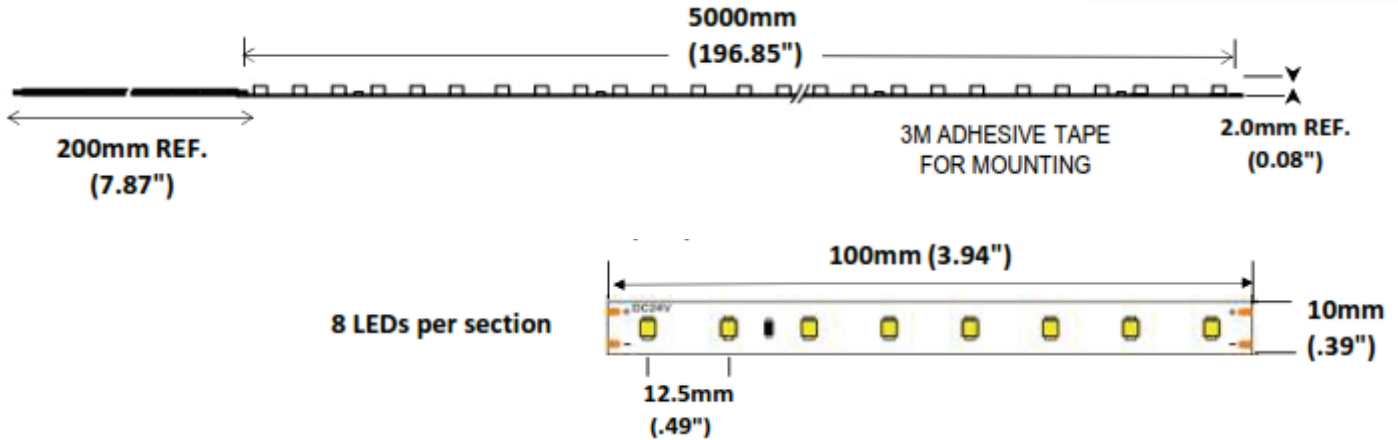

Parameter	Symbol	Rating	Units
Forward Current	IF	2.5	A
Power Dissipation	PD	60	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+50°C	°C
Storage Temperature	Tstg	-30~+80°C	°C



Electro-Optical Characteristics (Ta=25°C)

JKL Part Number	Color	Number of LEDs	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-105000-24WW	Warm White	400	24	60	2.5	120°C	3050°K	8,520
ZFS-105000-24NW	Neutral White	400	24	60	2.5	120°C	4250°K	9,120
ZFS-105000-24CW	Cool White	400	24	60	2.5	120°C	6250°K	9,600

Note:

Maximum length in series: 5 Meters (16 feet) / 1 Reel

METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- 0	COMPONENTS CORPORATION	
	TITLE HIGH BRIGHTNESS 10MM LED FLEX RIBBON, 24VDC		
DRAWN BY S.Newton	APPVD BY DATE S.N. 5/16/22	SIZE A	FSCM NO. 55335
DRAWING NO. ZFS-105000-24 MULTI		SCALE NONE	DRAWING NO. ZFS-105000-24 MULTI
RELEASED 5/16/22	APPVD DATE 5/16/22	RELEASED DATE 5/16/22	REVISION DATE 5/16/22
REV. NO. 1	DESCRIPTION/ECO NUMBER 1 OF 1	MANUAL REVISIONS NOT PERMITTED	SHEET NO. 1 OF 1