


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.13-IPX4L-SALRF3GT-4IN (4 INCHES)  
 CB1.13-IPX4L-SALRF3GT-10IN (10 INCHES)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		PRODUCTION RELEASE	M. LARSEN	06/03/2022

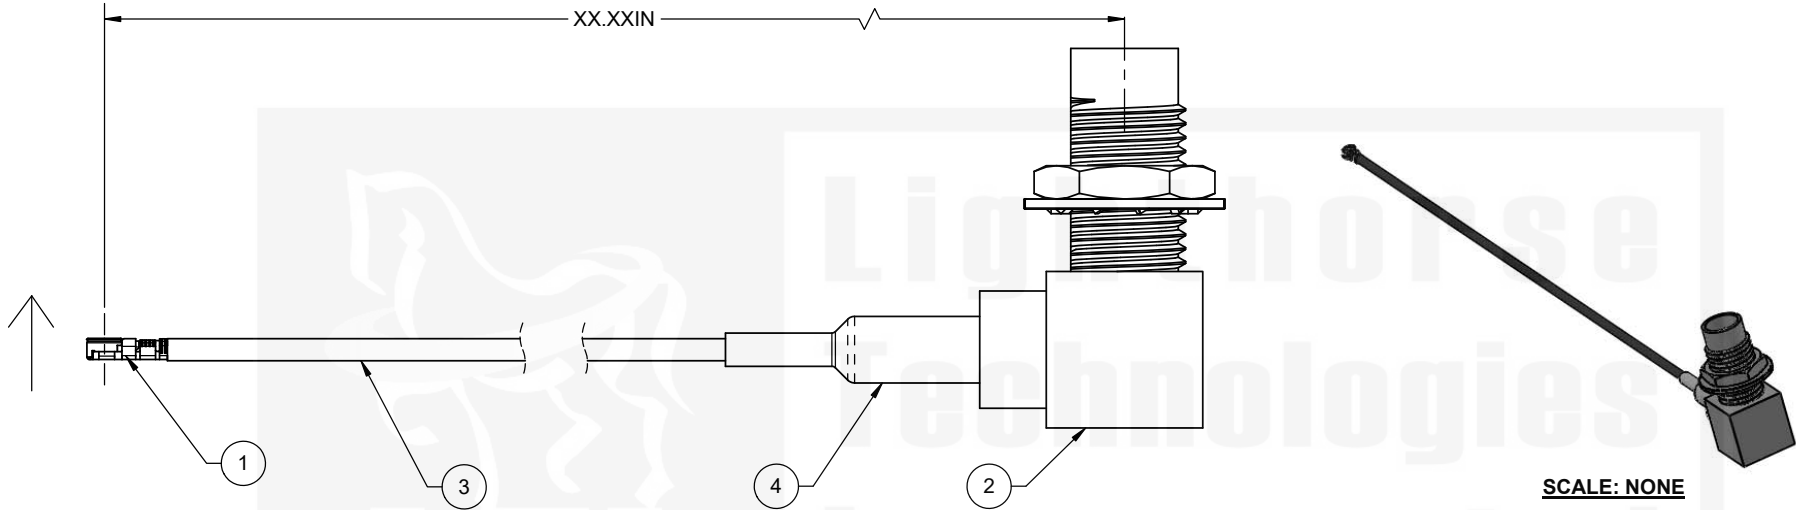

SCALE: NONE

ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLF11GBP-113	IPX4L (MHF4L), RHT ANGLE, JACK, CABLE CRIMP (I-PEX 20565-001R-13)	1
2	SALRF13RGT-316	SMA, RIGHT ANGLE, REV POL JACK, BLKHD MNT, CABLE CRIMP	1
3	1.13 MICRO COAX	CABLE, 1.13 MICRO COAX, BLACK	AR
4	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		<p><b>Lighthouse Technologies</b>                  San Diego, CA                  WWW.RFCONNECTOR.COM</p>
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30°		
THIRD ANGLE PROJECTION 		TITLE: CABLE ASSEMBLY, IPX4L (MHF4L), R/A JACK CRIMP TO RP SMA, R/A JACK, BLKHD MNT CRIMP USING 1.13 MICRO COAX
CUSTOMER APPROVAL		SIZE PART/DWG. NO: REV <b>B</b> CB1.13-IPX4L-SALRF3GT-xxIN <b>A</b>
SIGN / DATE:		SCALE: 4:1 FILE NAME SHEET 1 OF 1
ENG APPR. P. BURDGE 06/03/2022	CHECKED M. HELD 06/03/2022	
DRAWN M. LARSEN 06/03/2022	NAME DATE	

**PROPRIETARY AND CONFIDENTIAL**

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

